



(19) Országkód

HU

MAGYAR  
KÖZTÁRSASÁGMAGYAR  
SZABADALMI  
HIVATALSZABADALMI  
LEÍRÁS

(21) A bejelentés ügyszáma: P 99 02841  
 (22) A bejelentés napja: 1997. 06. 12.  
 (30) Elsőbbségi adatok:  
 9602352-8 1996. 06. 14. SE  
 (86) Nemzetközi bejelentési szám: PCT/SE 97/01033  
 (87) Nemzetközi közzétételi szám: WO 97/47349

(40) A közzététel napja: 1999. 12. 28.  
 (45) A megadás meghirdetésének dátuma a Szabadalmi  
 Közlönyben: 2003. 06. 30.

(11) Lajstromszám:

222 366 B1

(51) Int. Cl.<sup>7</sup>

A 61 M 25/00

(72) Feltalálók:

Pettersson, Agneta, Göteborg (SE)  
 Utas, Jan, Kungsbacka (SE)

(73) Szabadalmaz:

ASTRA Aktiebolag, Södertälje (SE)

(74) Képviselő:


Ráthonyi Zoltán, S. B. G. & K. Budapesti  
 Nemzetközi Szabadalmi Iroda, Budapest

(54)


## Katétercsomagolás és eljárás előállítására

## KIVONAT


A katétercsomagolás (10, 110, 210) bevont felületű katéter(ek)e(t) (1, 101, 201), valamint a katéter(ek)e(t) körülvevő, és a sterilizálószernek a katéter(ek)hez való jutását lehetővé tevő belső tartály(oka)t tartalmaz. A tartály(ok) belső tasak(ok) (2, 102, 202), amely(ek)nek van továbbá a nedvességnek a belső tasak(ok)hoz jutását megakadályozó külső tasakja (3, 103, 203). A katétercsomagolás (10, 110, 210) előállítási eljárása során a felületi bevonattal ellátott katéter(ek)e(t) (1, 101, 201) (egy) belső tasak(ok)ba (2, 102, 202) helyezik, amely(ek) átengedik a sterilizálóközeget a benne/bennük lévő katéter(ek)hez (1, 101, 201), majd a katéter(ek)e(t) (1, 101, 201) tartalmazó belső tasak(oka)t (2, 102, 202), előnyösen etilén-oxiddal sterilizálják, majd egy további műveleti lépésben a sterilizált katéter(ek)e(t) (1, 101, 201) tartalmazó belső tasako(ka)t (2, 102, 202), nedvesség bejutását megakadályozó külső tasakba (3, 103, 203) helyezik.




2A. ábra

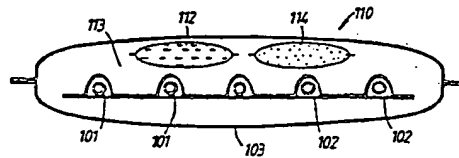


3. ábra

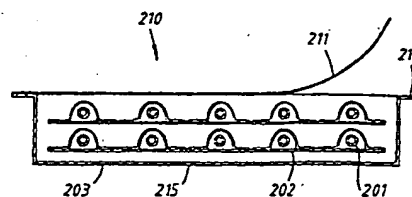


5. ábra

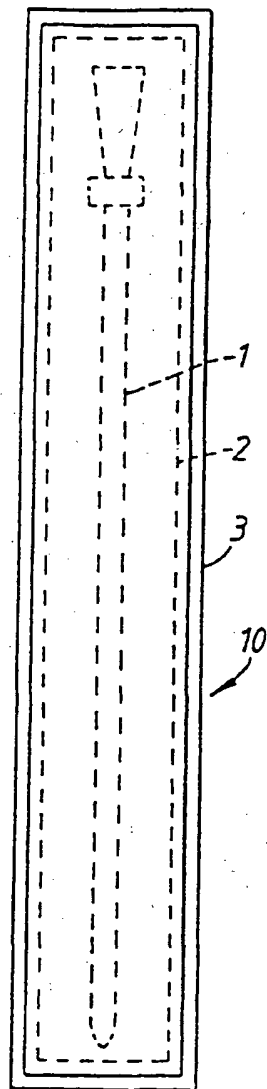


1. ábra

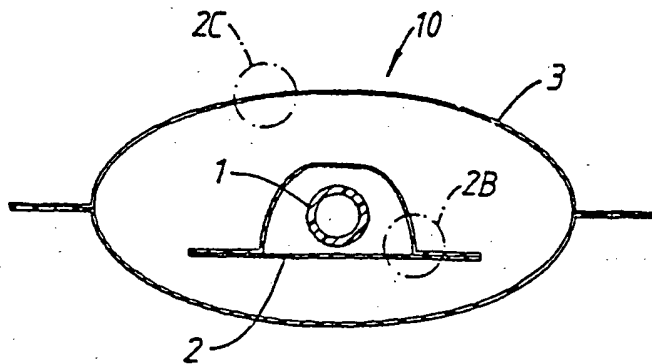


2A. ábra




2B. ábra




2C. ábra

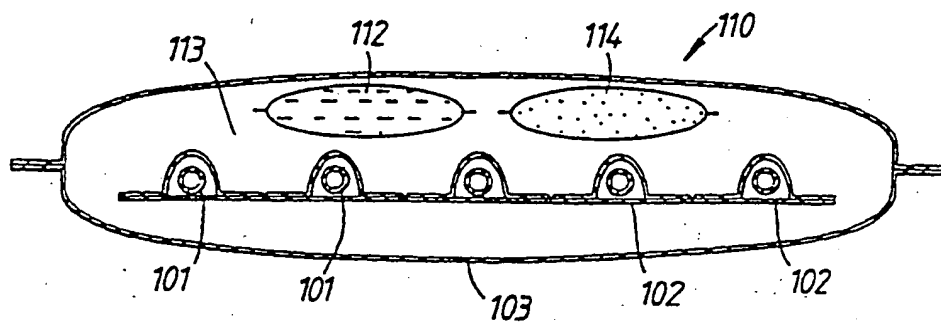

3. ábra

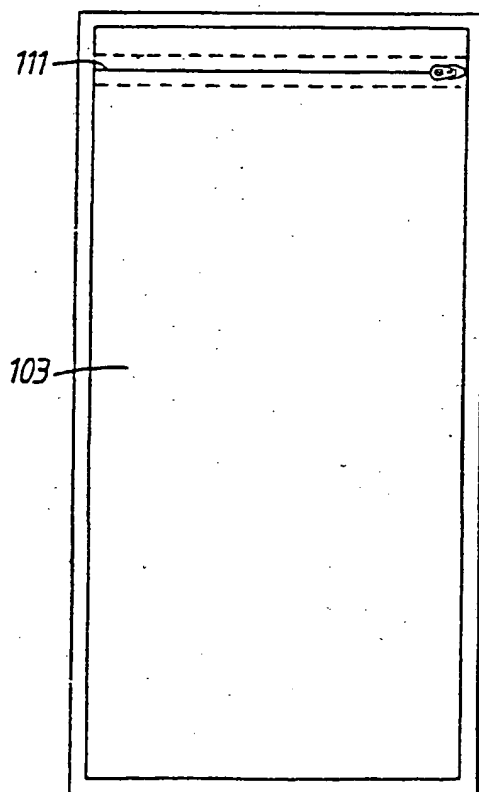

4. ábra

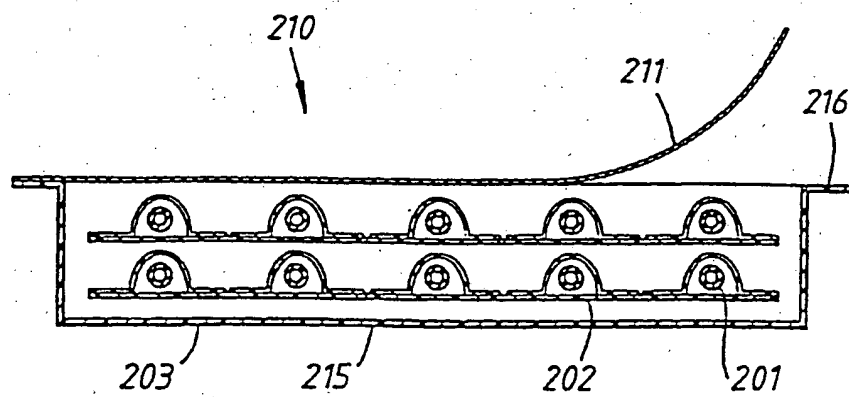

5. ábra

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>A61M 25/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 97/47349</b> (43) International Publication Date: 18 December 1997 (18.12.97)</p>
<p>(21) International Application Number: PCT/SE97/01033 (22) International Filing Date: 12 June 1997 (12.06.97) (30) Priority Data: 9602352-8 14 June 1996 (14.06.96) SE (71) Applicant (for all designated States except US): ASTRA AKTIEBOLAG [SE/SE]; S-151 85 Södertälje (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): PETTERSSON, Agneta [SE/SE]; Råstensgatan 52 C, S-416 54 Göteborg (SE). UTAS, Jan [SE/SE]; Sparvvägen 9, S-434 96 Kungälv (SE). (74) Agents: PÅRUP, Mats et al.; Astra Aktiebolag, Patent Dept., S-151 85 Södertälje (SE).</p>		<p>(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: CATHETER PACKAGE

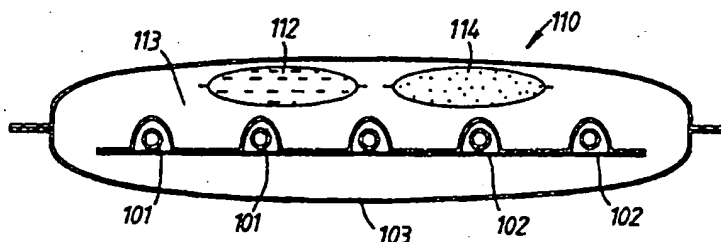

(57) Abstract

A catheter package (10; 110; 210) comprising a catheter (1; 101; 201) positioned within an inner container (2; 102; 202) permeable to a sterilising agent, for example an ethylene oxide gas. An outer container (3; 103; 203) which prevents access of moisture to the interior thereof encloses the inner container and catheter assembly. Two or more catheters may be stored in individual inner containers within the outer container.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## CATHETER PACKAGE

### Technical field of the invention

- 5 The present invention relates to a catheter package, and to a method of packaging catheters in the same.

### Background to the invention

- 10 Catheters having exterior coatings have been known for many years. Typically the coating is a hydrophilic layer designed to reduce the coefficient of friction in the wet condition, so that the catheter may be inserted relatively painlessly into the urethra of the patient, and likewise removed therefrom when required.

- 15 Typical examples of such catheters are made known in European patent specifications EP-B-0093093 (Astra Meditec AB) and EP-B-0217771 (Astra Meditec AB). EP-B-0093093 discloses a process for providing a polymer surface, such as a urinary latex catheter, with a primary coating including an isocyanate compound, and a secondary coating including polyvinylpyrrolidone. EP-B-0217771 discloses a method of forming an improved hydrophilic coating in order to retain the slipperiness for a longer time on a  
20 substrate, such as a urinary PVC catheter, by applying a solution comprising a solvent having an osmolality-increasing compound such as sodium chloride.

- Catheters are conventionally packaged in a paper package, in order to allow them to be  
25 sterilised before they are used. Such sterilisation typically is performed at the time of manufacture, using techniques well-known in the art such as gamma-irradiation or fumigation with ethylene oxide gas. If ethylene oxide is used, it must be allowed to have access to the catheter surface, and a paper package allows this to occur. The conventional approach is to use a paper which is permeable to ethylene oxide, grid-lacquered with

polyethylene and welded around its edge to a laminate of, for example, polyethylene-polypropylene or polyethylene-polyethylene terephthalate, or possibly polyethylene-nylon.

Applicant has observed that a problem encountered with coated catheters is that the surface of the catheter can become sticky and adhere to the paper of the package causing the coating on the catheter to be damaged, destroyed or mutilated.

Inserting a plastics material adjacent to the interior surface of the paper has been suggested, creating a loose paper-plastic laminate sealed just around its edges so that the catheter does not come into immediate contact with the paper. However, this has the disadvantage that a barrier is now in place which prevents penetration of ethylene oxide into the interior of the package so as to be brought into contact with the surface of the catheter. Such a package could only effectively be sterilised by irradiation, although an alternative is to provide a number of slits in the plastics material, thin enough to prevent the catheter surface from coming into direct contact with the paper and yet capable of opening wide enough to allow access of ethylene oxide at the required time.

This clearly means that the manufacturing process is made more complicated than would be desirable. In particular, the slits in the plastics material have to be carefully regulated so that they do not permit contact of the catheter surface with the paper, without in any way hindering sterilisation with ethylene oxide.

#### Disclosure of the invention

There is therefore a need for an improved catheter package and according to the present invention there is provided a catheter package comprising a surface coated catheter, for example a hydrophilic outer surface coated catheter, and a container which encloses the catheter and permits the passage of a sterilising agent for the catheter therethrough, for example an ethylene oxide gas, characterised in that the container is an inner container and



that the catheter package further comprises an outer container which encloses the inner container and prevents or substantially prevents access of moisture to the interior thereof.

Such a package can overcome the disadvantages inherent in the prior art whilst still being  
5 simple to manufacture. It thus appears that the sticky surface of the catheter is caused by the gradual ingress of moisture into the package during storage.

The outer container of the package may be formed from a single layer of a plastics material such as polyethylene or poly(vinylidene dichloride) (PVDC). However, a better moisture-  
10 tight barrier may be achieved by using a laminate including a metallic layer such as aluminium. Typically a laminate of aluminium and polyethylene could be used, with the polyethylene on the interior of the outer container. Such a material would be quite fragile, but this may be compensated for by providing a strengthening outer layer of a plastics material such as polyester or oriented polypropylene, for example biaxially oriented  
15 polypropylene.

Applicant has also found that a moisture-tight barrier can be obtained by using a silicon oxide, for example silicon dioxide, in the construction of the outer container. The silicon oxide can be supported in a matrix material such as a polyester, polyethylene terephthalate  
20 (PET), nylon or polypropylene or as supplied by Mitsubishi under the trade name Techbarrier-S and may further be used as one layer of a laminate used to construct the outer container. If need be, a strengthening outer layer of a plastics material can again be used in the outer container construction.

25 Alternatively, a metallised film such as a metallised film of PET with aluminium oxide may be used. The metal content of this is very small, which is environmentally better, and yet Applicant has found it to be a good moisture barrier. Nylon and polypropylene are alternatives to polyethylene terephthalate in such films.

Poly chloro tri fluoro ethylene (PCTFE) may also be mentioned as a possible barrier material for the outer container construction.

One catheter may be stored in each package. However, as catheters are generally used once  
5 or a very few times and then replaced, two or more catheters may be stored in individual inner containers within a single outer container.

In such a case, it would be an advantage if the outer container could be sealed again whenever an inner container containing a catheter is taken out. This may be achieved by  
10 providing a means for re-closing the outer container, such as a zip fastener or a resealing tape.

Even so, it is possible that small amounts of moisture may diffuse through the outer container into the cavity between the inner and outer containers during prolonged storage,  
15 or enter when a catheter is removed if a re-closing means is provided. Applicant has found that diffusion of moisture can occur particularly when the outer container comprises a single polymeric layer such as polyethylene. This problem may be obviated by placing a desiccant in this cavity. A typical desiccant would comprise a sachet of silica gel, or a molecular sieve or calcium chloride.

20 Applicant has found that sometimes the use of plasticiser, or solvents in glue, during the manufacture of the catheter or the outer container can cause malodorous fumes to develop in the cavity between the inner and outer containers during prolonged storage. This may be obviated by placing a deodorant material in this cavity. A typical deodorant material would  
25 comprise a sachet of active carbon.

The package is particularly, although not exclusively, suitable for use in combination with a catheter having a hydrophilic coating. Such a coating is always more or less sensitive to water. Examples of moisture-sensitive coatings are polyethylene oxide,  
30 poly(vinylpyrrolidone) (PVP) and cellulose polymers such as hydroxyethylcellulose or

hydroxypropylcellulose. The coating may include an osmolality-increasing compound such as sugar, urea or an inorganic salt. Typically such compounds are crystalline in form and readily soluble in water. Suitable inorganic salts include sodium and potassium chlorides, iodides, nitrates, citrates and benzoates.

5

According to the invention there is further provided a method of manufacturing a catheter package comprising the steps of enclosing a surface coated catheter in an inner container which permits access of a sterilising agent therethrough to the enclosed catheter and exposing the inner container and catheter assembly to the sterilising agent sufficiently to  
10 sterilise the catheter characterised by the provision of the further step of enclosing the inner container and catheter assembly in an outer container which prevents or substantially prevents access of moisture to the interior thereof.

#### **Brief description of the drawings**

15

Embodiments of the invention will now be described, by way of example, with reference to the attached drawings in which—

Fig. 1 is a view of a catheter package according to a first embodiment of the present  
20 invention comprising an inner container which encloses a catheter and an outer container which encloses the inner container;

Fig. 2A is a cross-sectional view of the catheter package of Fig. 1;

25 Fig. 2B is a cross-sectional view of the construction of the boundary wall of the inner container of Fig. 1;

Fig. 2C is a cross-sectional view of the construction of the boundary wall of the outer container of the catheter package of Fig. 1;

30

Fig. 3 is a cross-sectional view of a catheter package according to a second embodiment of the invention comprising a plurality of catheters within individual inner containers all enclosed within an outer container;

5 Fig. 4 is a further view of the catheter package shown in Fig. 3; and

Fig. 5 is a cross-sectional view of a catheter package according to a third embodiment of the invention comprising a plurality of catheters within individual inner containers all enclosed within an outer container.

10

#### Detailed description of embodiments of the invention

Referring to Fig. 1 and Figs. 2A to 2C, a catheter package 10 according to a first embodiment of the present invention comprises a catheter 1 positioned within an interior pouch 2 which is itself positioned within an exterior pouch 3. The catheter 1 may, for  
15 example, be a urinary PVC catheter with a hydrophilic coating which includes an osmolality-increasing compound such as sodium chloride, as disclosed in EP-B-0217771.

The construction of the interior pouch 2 is such that it is permeable to ethylene oxide gas.  
20 As can be seen from Fig. 2B, the interior pouch 2 is formed from a first boundary wall section comprising a layer of paper 10 grid-lacquered with a layer of polyethylene 9 and a second boundary wall section comprising a laminate of, for example, a layer of polyethylene 8 and a layer of polypropylene 7 welded to the edge of the first boundary wall section. A laminate of polyethylene-polyethylene terephthalate, or possibly polyethylene-  
25 nylon, could also be used for the second boundary wall section, and the edges could also be sealed by crimping or folding. Instead of paper, Tyvek™, a non-woven material of polyethylene fibres supplied by DuPont, might be used in the first boundary wall section. In this case, the additional layer of polyethylene 9 would be unnecessary as the non-woven material would itself be able to form a good seal by welding.

30

The construction of the exterior pouch 3, on the other hand, is such that it prevents the access of moisture to the interior pouch 2. As shown in Fig. 2C, the exterior pouch 3 is formed from a laminate composed of a layer of aluminium 5 and a layer of polyethylene 6, with the polyethylene layer 6 being on the interior of the exterior pouch 3. An exterior layer of polyester 4 is supported on the aluminium layer 5. The edges of the exterior pouch 3 are sealed together by welding. Typical dimensions are 30 to 50  $\mu\text{m}$  for the polyethylene layer 6, 8 to 10  $\mu\text{m}$  for the aluminium layer 5 and 10 to 20  $\mu\text{m}$  for the polyester layer 4.

Alternately, a layer comprising a silicon oxide may be substituted for the aluminium layer 5, for instance a layer of the silicon oxide barrier material sold by Mitsubishi under the trade name Techbarrier-S. An aluminium oxide could also be used to form the barrier layer as could PCTFE.

The catheter package 10 is assembled by firstly enclosing the catheter 1 in the interior pouch 2 and then exposing the interior pouch 2 to ethylene oxide gas until the catheter 1 becomes sterilised. The interior pouch 2 is then enclosed in the exterior pouch 3.

It has been found that the catheter package 10 gives a shelf-life of at least one year without the surface of the catheter 1 becoming sticky. The problem of damage occurring to the coating of the catheter 1 by adherence thereof to the paper layer 10 of the interior pouch 2 is therefore alleviated.

In Figs. 3 and 4 there is shown a catheter package 110 according to a second embodiment of the present invention. In this instance a plurality of catheters 101 are stored in individual interior pouches 102 within a single exterior pouch 103. The constructions of the interior and exterior pouches 102, 103 are as in the first embodiment hereinabove described with reference to Figs. 1 and 2A to 2C. However, in this case a zip-fastener 111 is made integral with the exterior pouch 103 for opening and closing the exterior pouch 103 to enable one interior pouch 102 at a time to be removed whilst minimising contact of the remaining interior pouches 102 with ambient air.

A desiccant comprising a sachet of silica gel 112 is also included in the cavity 113 between the exterior pouch 103 and the interior pouches 102. A deodorant material comprising a sachet of active carbon 114 is also provided in the same cavity 113.

- 5 The catheter package 110 also gives a shelf-life of at least one year without the surface of the catheters 101 becoming sticky. Furthermore, the user is not confronted by noxious fumes on opening the exterior pouch 103.

The catheter package 110 is manufactured by forming each interior pouch 102 about the catheter 101 that it contains and sealing the edges of the interior pouches 102 by welding  
10 them together. Ideally a number of interior pouches 102 may be manufactured as a single unit, joined at the edges so that they may be separated when required. The interior pouches 102 are then sterilised by exposure thereof to ethylene oxide gas and aerated to remove excess ethylene oxide. An optional irradiation step may be included.

15 The interior pouches 102 are collected together along with the sachets of silica gel 112 and active carbon 114. The exterior pouch 103 is then formed about these. The most expedient way of achieving this is to use a prefabricated pouch 103 in which three of the four edges have already been sealed together by welding. The contents are then inserted and the  
20 fourth edge of the exterior pouch 103 sealed together as well, again by welding.

Turning now to Fig. 5, a catheter package 210 according to a third embodiment of the present invention comprises several catheters 201 stored in individual interior pouches 202 of the same construction as in the first embodiment hereinabove described with reference  
25 to Figs. 1 and 2A to 2C which are in turn stored within a single exterior pouch 203. The exterior pouch 203 comprises a vacuum-formed tray 215 with a flat lid 216. The tray 215 and lid 216 are both made of a barrier material that prevents the access of moisture to the interior pouches 202 and may be formed from the same or different materials. Use of the same material is convenient though. As suitable materials there may be mentioned  
30 polypropylene, poly(vinylidene dichloride) (PVDC), a metallised film, and an aluminium

lamine with polyethylene, polyester, polystyrene, polypropylene or nylon. The necessity to vacuum-form the tray 215 means that certain restrictions are imposed on its thickness, though any reasonable thickness of material may be used for the lid 216. A typical thickness for the tray 215 would be in the range of 400 to 600  $\mu\text{m}$ , although if a stiffer material were used a thickness down to 100 or 200  $\mu\text{m}$  is possible. The tray 215 could also be made of a foamed material, such as expanded polystyrene.

A means for opening and closing the exterior pouch 203 comprising a resealing tape 211 is made integral with the lid 216 of the pouch 203. Thus contact of the interior pouches 202 with ambient air is minimised.

The catheter package 210 is manufactured by collecting together the interior pouches 202 after exposing them to a sterilising agent such as ethylene oxide gas and forming the exterior pouch 203 about these. The most expedient way of achieving this is to place the interior pouches 202 within the well of the vacuum-formed tray 215 of the exterior pouch 203 and then sealing the edges of the lid 216 of the exterior pouch 203 onto the tray 215 by welding. The depth of the tray 215 can, as shown, be selected so as allow more than one layer of catheters 201 to be inserted.

**CLAIMS:**

1. A catheter package comprising a surface coated catheter and a container which encloses the catheter and permits the passage of a sterilising agent for the catheter  
5 therethrough, characterised in that the container is an inner container and that the catheter package further comprises an outer container which encloses the inner container and prevents or substantially prevents access of moisture to the interior thereof.
2. A package as claimed in claim 1, characterised in that the outer container  
10 construction comprises a laminate which includes a metallic layer.
3. A package as claimed in claim 1, characterised in that the outer container construction comprises a layer comprising a silicon oxide.
- 15 4. A package as claimed in claim 2 or 3, characterised in that the outer container comprises a strengthening outer layer of a plastics material.
5. A package as claimed in any one of the preceding claims, characterised in that the catheter and inner container form a catheter package sub-assembly and that the catheter  
20 package comprises one or more further catheter package sub-assemblies within the outer container.
6. A package as claimed in claim 5, characterised in that means for repeated opening and closing of the outer container are provided.  
25
7. A package as claimed in any one of the preceding claims, characterised in that a desiccant is disposed in-between the inner and outer containers.
8. A package as claimed in any one of the preceding claims, characterised in that a  
30 deodorant is disposed in-between the inner and outer containers.



9. A package as claimed in any one of the preceding claims, characterised in that the or each catheter is a hydrophilic outer surface coated catheter.
10. A package as claimed in any one of the preceding claims, characterised in that the  
5 sterilising agent is an ethylene oxide gas.
11. A package as claimed in claim 9 or claim 10 when appendent on claim 9, characterised in that the hydrophilic coating comprises an osmolality-increasing compound.
- 10 12. A package as claimed in claim 9, claim 10 when appendent on claim 9, or claim 11, characterised in that the hydrophilic coating comprises an inorganic salt selected from sodium and potassium chlorides, iodides, nitrates, citrates and benzoates.
13. A method of manufacturing a catheter package comprising the steps of enclosing a  
15 surface coated catheter in an inner container which permits access of a sterilising agent therethrough to the enclosed catheter and exposing the inner container and catheter assembly to the sterilising agent sufficiently to sterilise the catheter characterised by the provision of the further step of enclosing the inner container and catheter assembly in an outer container which prevents or substantially prevents access of moisture to the interior  
20 thereof.
14. A method as claimed in claim 13, characterised in that the catheter is a hydrophilic outer surface coated catheter.
- 25 15. A method as claimed in claim 13 or 14, characterised in that the sterilising agent is an ethylene oxide gas.

1/3

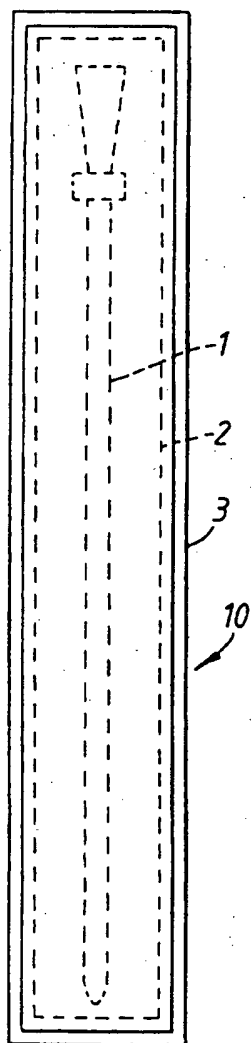


Fig. 1

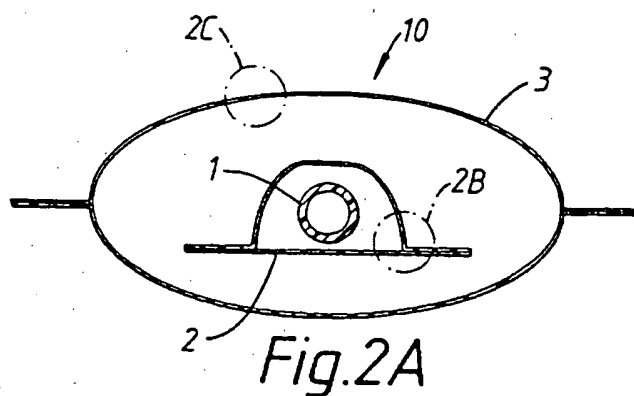


Fig. 2A




Fig. 2B




Fig. 2C

2/3

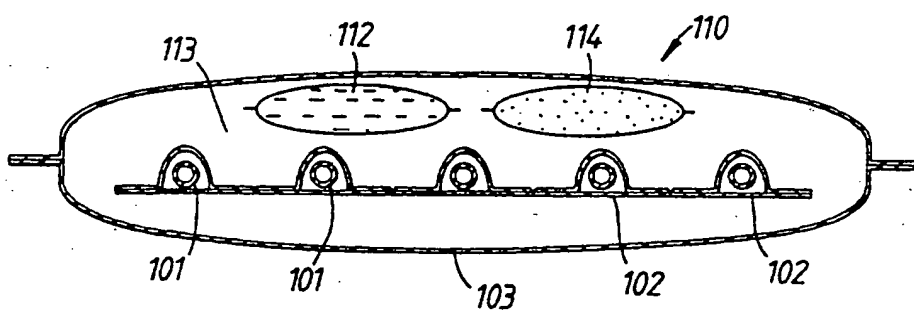


Fig. 3

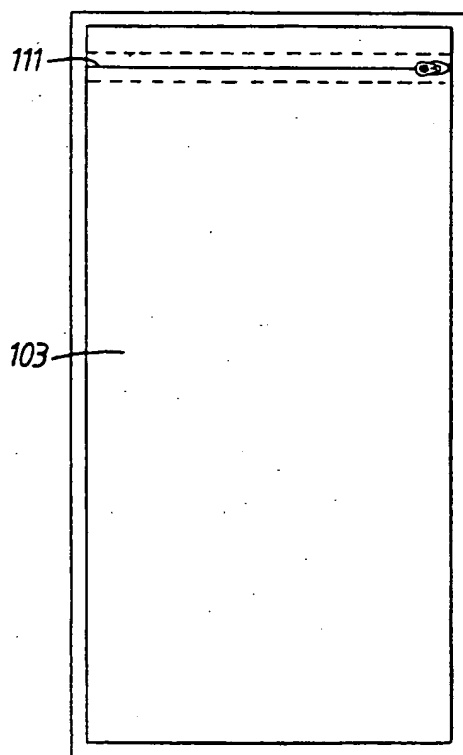


Fig. 4

3/3

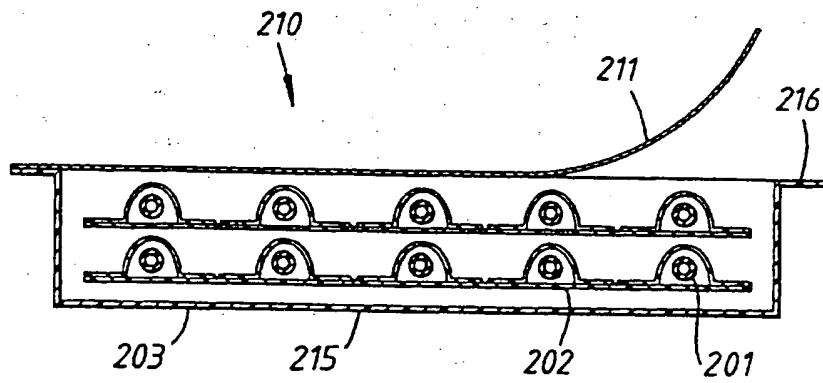


Fig.5

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/01033

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: A61M 25/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2131384 A2 (SMITH INDUSTRIES PUBLIC LTD CO.), 20 June 1984 (20.06.84), see the whole document  --	1-15
A	EP 0677299 A1 (VIA LOG MEDIKALPRODUKTE GMBH KOSMETIK-MEDIEN), 18 October 1995 (18.10.95), claims 8-10  --	1-15
A	EP 0629415 A (SCHNEIDER (EUROPE)AG)), 21 December 1994 (21.12.94), column 4, line 17 - line 37  -- -----	2



Further documents are listed in the continuation of Box C.



See patent family annex.

## \* Special categories of cited documents

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

11 Sept 1997

Date of mailing of the international search report

22 -09- 1997

Name and mailing address of the ISA /

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Tommy Somlo

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

01/09/97

International application No.  
PCT/SE 97/01033

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
GB	2131384	A2	20/06/84	FR 2536985 A,B	08/06/84
EP	0677299	A1	18/10/95	DE 4412754 A	19/10/95
EP	0629415	A	21/12/94	AU 6204696 A	07/11/96
				AU 6464894 A	12/01/95
				CA 2123747 A	19/12/94
				JP 7052979 A	28/02/95
				US 5467873 A	21/11/95